

SKIPLOADERS

AN UNBEATABLE INVESTMENT



HYVA[®] LIFT

www.hyva.com

HYVA LIFT SKIPLOADERS AN UNBEATABLE INVESTMENT



The steel platform is provided with two wearing strips in longitudinal direction. 6 adjustable container stops can be located through side steaks in the platform.



Range

Hyva Lift skiploaders are available in different versions with fixed lifting arms, telescopic arms and knuckle arms. Telescopic arms can be extended simultaneously or independently for maximum operational flexibility.

Transportation of pallets, loading platforms or flat racks up to 6 metres in length is possible with Hyva Lift skiploaders. Fully loaded skips can be dropped over ditches, fences and hedges. And, stacking of empty skips allows more efficient multi-drop operations.

GVW (ton)	Hyva Lift Type	Lifting capacity		System weight (kg ±)
		retracted (ton)	extended (ton)	
4 to 7,5	NG2004TA	4	1,5	1630
7,5 to 13	NG2006	6	-	1900
	NG2006TA	6	3,9	2130
12 to 16	NG2008	8	-	2150
	NG2008TA	8	5,1	2300
16 to 22	NG2012	12	-	2670
	NG2012TAXL	12	7,5	2850
	NG2012KA	12	7,0	3000
18 to 26	NG2014	14	-	2670
	NG2014TAXL	14	8,75	2850
	NG2114TA*	14	8,75	2900
26 to 32	NG2018	18	-	3320
	NG2018TAXL	18	11,5	3500
	NG2018KA	18	11,0	3700

*) "crancked arm" type

An unbeatable investment

The Hyva Lift range of skip loaders gives you choice, strength and proven reliability. Specified by contractors and municipal authorities throughout the world for their durability, Hyva Lift skip loaders are manufactured to the highest quality standards and supported by an international service network.

With proven engineering back up and a comprehensive warranty system, Hyva Lift skiploaders give excellent return on capital for years and years.



Top swivel brackets, each suitable for two chains.




Walk on protection guards, for protection of the piston rod.



All functions are operated from the side of the system, at the valve block. In-cab controls are available as an option.



Stab jacks are standard, for safe lifting and tipping of containers.

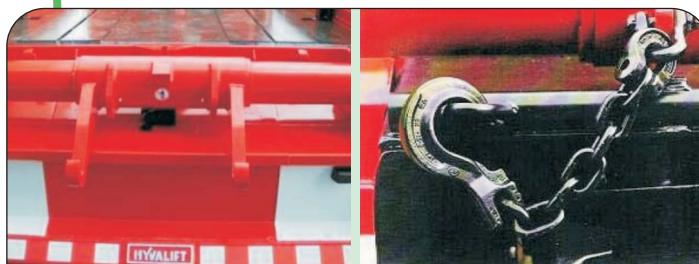

One tipping chain, length 650mm with open safety hook is mounted on the torsion tube. A second tipping chain or tipping hooks are available as an option.



The torsion casing is set on spreadable bearings.



Knuckle arm



Fixed arm



Removable skiploader on tractor

Hyva Group

Ondernemingsweg 1
2404 HM Alphen aan den Rijn
The Netherlands
Telephone +31 (0)172 - 423 555
Fax +31 (0)172 - 433 196
info@hyva.com

Dealer: